


# UTC-6000 Industrial Water Sanitizing System Operating Instructions

## Product Overview

This powerful product delivers 1.5 parts per million at 1ppm dissolved ozone. This unit utilizes six individual ozone generator cells that are easily maintained or replaced.

## Important Safety Instructions

- Do not operate this unit if it has a damaged cord or plug, or after a malfunction.
- Follow installation instructions
- Only use a cold water supply
- Inlet water pressure should not exceed 85psi with a minimum of 25psi. In-excess of 85psiI will damage unit and void the warranty. A water pressure regulator may be needed (not supplied).
- If the unit requires servicing, always turn off the water supply and disconnect the power supply before removing the unit. Do not try to attempt to repair the unit yourself. Only qualified service personnel should service this unit and your warranty will be voided if you open the unit. Contact Aqua Sun Ozone for examinations, adjustments and all other repairs.

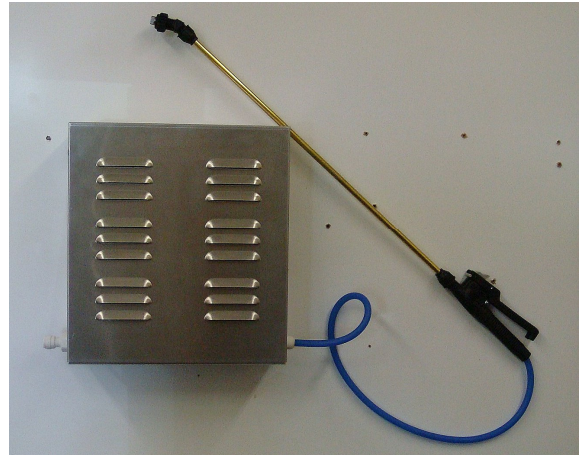

## Applications (SIP) Sanitize in Place

Ideal for Sanitizing:

- Food processing areas and food processing utensils and equipment
- Packing areas
- Floors and drains
- Farm Equipment; equipment used to pick crops, tractors and any equipment that is water compatible can be sprayed down and sanitized with this unit
- Bottling rooms
- Clean rooms

The uses for this product are as endless as your to-do list.

## Specifications

- Power: 120V AC 60 Hz
- Flow rate: 1.5 GPM at 50psi
- Max. & Min. Water Pressure: 85psi & 15psi
- Ozone Output: 1000 mg/hr
- Ozone Residual: 1.5ppm
- Dimensions of UTC Box: (L)13" (W)11.75" (H)4"
- Weight: 9 lbs

## Features

- All Internal Components are UL Listed
- Solid-state Electronics Encased in Epoxy
- Includes Sanitizing Sprayer Wand
- Unit activation as wand is opened and closed
- State-of-the-art Ozone Generator
- State-of-the-art Venturi Injector

## Parts List

- (1) Sprayer Wand & Installation Instructions
- (1) 120V Power Supply Cord
- (1) 12' of  $\frac{3}{8}$ " Tubing (additional tubing available if required for your specific application)
- (1)  $\frac{3}{8}$ " Faucet Adapter (if needed other sizes are available at local hardware store)
- (3) Ozone Present Test Strips
- (2) Mounting Screws
- Optional: Faucet (not included)

## Warranty

- One Year